



A new meter collar device that makes connecting a portable generator safe and easy

Connecting A Portable Generator is Now Safe and Easy with GenerLink™



SAFE

GenerLink™ eliminates the use of extension cords and other connections that can be hazardous to customers and utility personnel.

GenerLink™ detects when a generator is operating and automatically disconnects from the utility grid, eliminating dangerous backfeed.

EASY

GenerLink™ is equipped with GenerLok™, a unique interlocking power cord system that provides a quick and easy connection of a portable generator.

GenerLink™ is installed in 20 minutes or less by utility personnel and does not require the customer's presence.

GenerLink™ is easily installed behind a customer's electric meter and requires no rewiring of the customer's electrical system.

With GenerLink™, customers have the flexibility to run virtually any appliance, up to the capacity of their generator by simply energizing appliances from their breaker panel.

GENERLINK™ with GENERLOK™ SPECIFICATIONS AND TECHNICAL INFORMATION MODEL MA23/24 - N/S

Physical:	Diameter:	6 ½ in.
	Depth:	5 ¼ in.
	Weight w/o surge:	5 ½ lbs
	Weight with surge:	5 ¾ lbs
	Socket Style:	Ring or Ring-less, 200 Amp, 4 jaw
Electrical:	Source Compatibility	200 Ampere or less
	Withstand Current:	10,000 Amperes rms symmetrical at .7 - .8 pf, 240 Volts, 60 Hz 6000 Amperes for 6 cycles at .7 - .8 pf, 240Volts, 60 Hz
	Generator Input:	10kW Continuous†, 120/240 Volt
	Connection:	Proprietary GenerLok™ QuickConnect Cord‡
Operational:	Transfer Type:	Break-Before-Make
	Transfer Delay:	2-3 Seconds
	Life Cycle:	300,000 Operations
	Temperature Range:	-30°C to 60°C External Ambient
Features:	Generator Input Protection:	Generator Input Voltage ≥ 200 Volts Supplemental Overcurrent ≤ 40 A
	Utility Input Protection:	Utility Input Voltage ≥ 180 Volts Over-Temperature Trip ≥ 105°C
	Load Protection:	Integrated Whole-House Surge Protection Model MA23/24 - S Only
	Status Indication:	Long-life LED indicators show utility power availability and/or fault presence

† 3 hours at 25° C ambient

‡ Sold Separately

* when protected by max 200 A circuit breaker in series with max 100 A branch circuit breaker

www.generlink.com

Bellah's Custom Homes Inc.
335 Cavanaugh Bay RD
Coolin, ID 83821
(208) 443-0365



BELLAH'S CUSTOM HOMES



Product Part #:	MA23-N	GenerLink, Non-Surge 30Amp
	MA23-S	GenerLink, Surge 30 Amp
	MA24-N	GenerLink, Non-Surge 40 Amp
	MA24-S	GenerLink, Surge 40 Amp

With Cable:	<u>MA23-N</u>	<u>MA23-S</u>	<u>MA24-N</u>	<u>MA24-S</u>
	\$689.95*	\$779.95*	\$839.50*	\$899.95*

*Pricing based on Standard cable L14-30, 20' length OR L14-20, 20' Length. MA 24 includes an *AWG 20' cord
(See illustrations and ordering information below)

Generlok™ cable length and connection options are shown below.
Please call out the version you need when placing your order:




L14-20 Locking



L14-30 Locking




L14-50 Straight

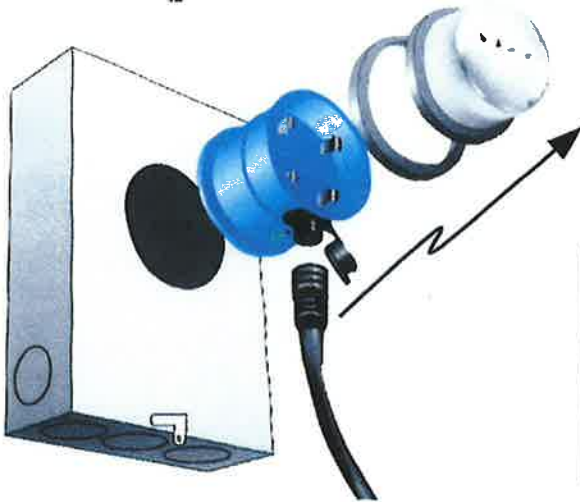

GenerLok Cord

GLC



Connector End:

- 1 - Locking L14-20 Amp
- 2 - Locking L14-30 Amp
- 3 - Straight L14-50 Amp

Cord Length/Pricing:

- 20 - 20' long (Standard stock item, included in set price above)
- 40 - 40' long (Custom, Additional \$50.00 to set prices above)
- 60 - 60' long (Custom, Additional \$100.00 to set prices above)
- 80 - 80' long (Custom, Additional \$150.00 to set prices above)
- 00 - 100' long (Custom, Additional \$200.00 to set prices above)*

* 100' is longest recommended cord length available. 10 AWG only

Example: GLC20-3 GenerLok Cord 20' long with Locking 30 Amp Connector

Stand Alone Cord Pricing**:

20 - 20' long, 20 or 30 Amp Connector	\$145
40 - 40' long, 20 or 30 Amp Connector	\$175
60 - 60' long, 20 or 30 Amp Connector	\$205
80 - 80' long, 20 or 30 Amp Connector	\$235
00 - 100' long, 20 or 30 Amp Connector	\$285

**Cords may be purchased separately from the standard GenerLink Set.10)AWG only

Pricing effective:
1/2016

kevinbellah@aol.com
335 Cavanaugh Bay Rd, Coolin Id 83821 208-443-0365 fax: 208-443-0373
bellahscustomhomes.com